



Specifications

Nominal Voltage		12 V
Capacity (25°C)	10HR(10.5V)	90 Ah
	5HR(10.2V)	70.2Ah
	1HR(9.6V)	52.4Ah
Dimension	Length	306±2mm (12.05inch)
	Width	168±2mm (6.61inch)
	Height	211±2mm (8.30inch)
	Total Height	216±2mm (8.50inch)
Approx. Weight		26.0kg (57.3lbs) ±4%
Terminal type		T11
Internal resistance (Fully charged, 25°C)		Approx. 5.4mΩ
Capacity affected by temperature (10HR)	40°C	103%
	25°C	100%
	0°C	88%
	-15°C	70%
Self-discharge (25°C)	3 month	Remaining Capacity: 94%
	6 month	Remaining Capacity: 88%
	12 month	Remaining Capacity: 75%
Nominal operating temperature		25°C±3°C(77°F±5°F)
Operating temperature range	Discharge	-15°C~55°C(5°F~131°F)
	Charge	-10°C~55°C(14°F~131°F)
	Storage	-20°C~55°C(-4°F~131°F)
Float charging voltage(25°C)		13.50 to 13.80V Temperature compensation: -18mV/°C
Cyclic charging voltage(25°C)		14.10 to 14.40V Temperature compensation: -30mV/°C
Maximum charging current		18A
Terminal material		Copper
Maximum discharge current		800A(5 sec.)
Designed floating life(20°C)		15 years


- Gelled electrolyte technology;
- PVC separator;
- Recognized by CE;
- ABS container.



Dimensions

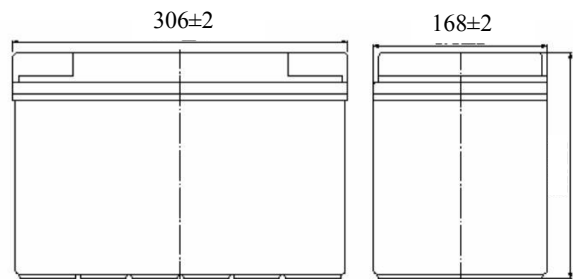

Terminal



T11

Constant Current Discharge Characteristics (A, 25°C)


F.V/TIME	10min	15min	30min	60min	2h	3h	4h	5h	8h	10h	20h
9.60V	193	150	90.9	56.4	32.9	23.0	18.8	16.1	11.0	9.16	4.81
9.90V	187	146	89.1	55.5	32.7	22.8	18.7	16.0	11.0	9.14	4.80
10.2V	179	141	86.4	54.1	32.4	22.7	18.6	15.9	10.9	9.12	4.79
10.5V	172	136	84.3	53.0	31.9	22.5	18.5	15.8	10.8	9.06	4.76
10.8V	162	129	81.2	51.4	31.1	21.8	17.9	15.3	10.5	9.00	4.73

Constant Power Discharge Characteristics (Watt, 25°C)


F.V/TIME	10min	15min	30min	60min	2h	3h	4h	5h	8h	10h	20h
9.60V	2082	1647	1020	642	381	270	221	190	131	109	57.7
9.90V	2020	1607	1000	633	379	268	220	189	130	109	57.6
10.2V	1936	1548	969	617	375	266	218	187	129	109	57.4
10.5V	1853	1495	945	605	370	265	217	186	128	108	57.1
10.8V	1749	1416	911	586	360	257	210	181	124	107	56.7

Note: The above characteristics data can be obtained within three charge/discharge cycles.


Discharge Characteristics(25°C)

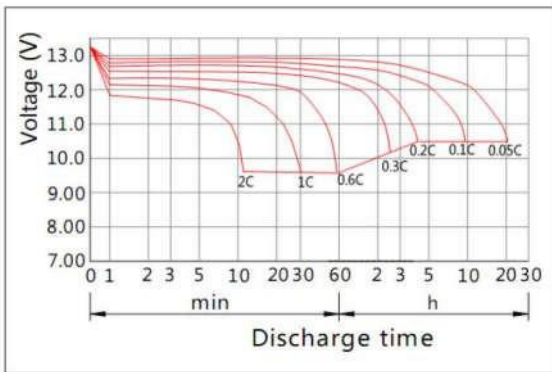


Charging Characteristics(25°C)

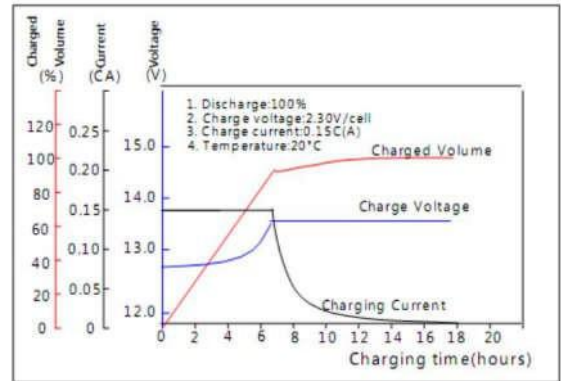


Effect of Temperature on Capacity

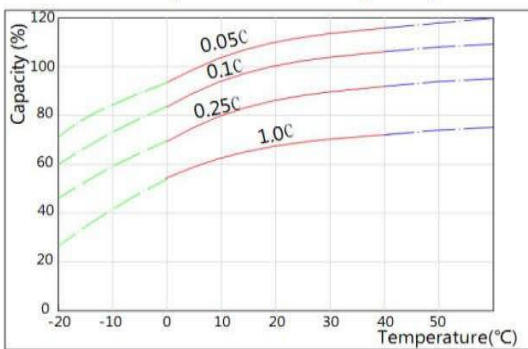


Self-discharge Characteristics

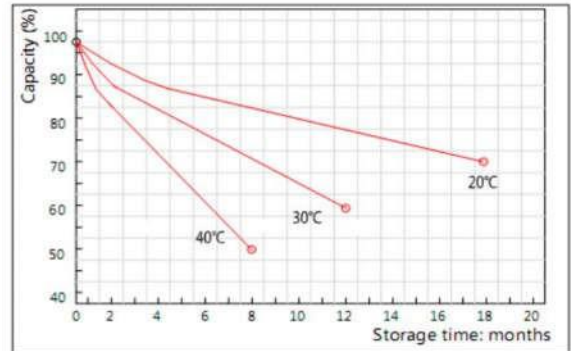


The Relationship for Open Circuit Voltage and Residual Capacity (25°C)

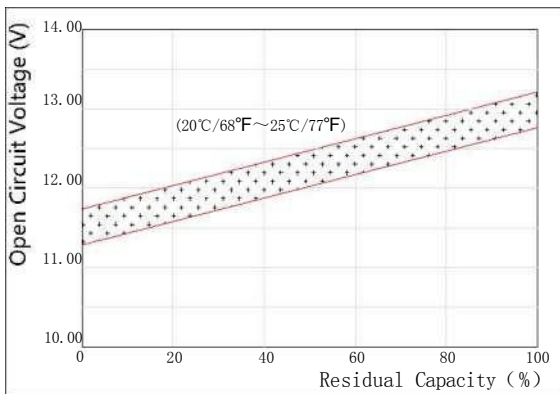

The Relationship for Charging Voltage and Temperature

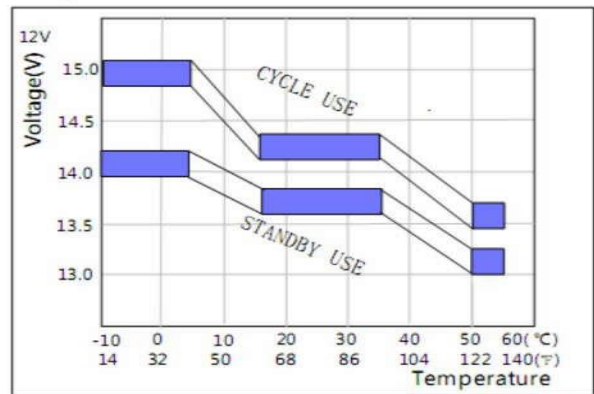

Floating Life on Temperature

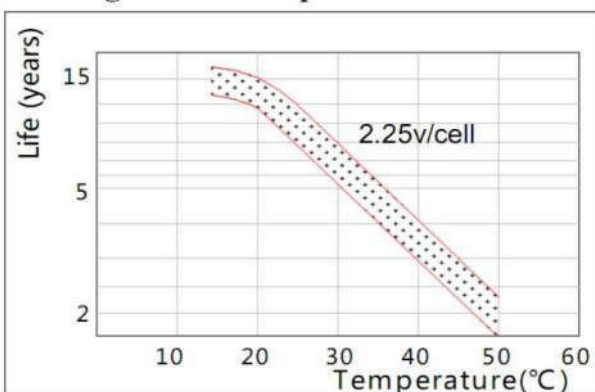

Cycle Life on D.O.D(25°C)

