




## Q4 Series Constant Current LED Driver Q4系列LED恒流驅動器

### Product Features:

- Independent compact design
- Easy press cable lock
- Captured terminal screws
- Safe no-load operation
- Overload protection
- Short circuiting protection
- Overheating protection
- Simple installation
- SELV equivalent
- Protection class II
- RI suppression is accordance with the new EMC standard (EN55015:2006+A1:2007+A2:2009)

### 產品特點:

- 超小體積，獨立式緊湊型設計
- 簡便自鎖式壓線蓋
- 螺絲鎖緊大接線端子，方便多規格接駁
- 安全無負載保護裝置
- 輸出過載保護
- 輸出短路保護
- 過溫保護功能
- 安裝經濟便捷
- 符合安全特低電壓標準
- 保護等級 II
- 符合全新的EMC新標準

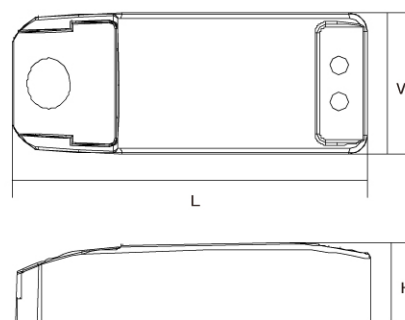

Model No. 型號	Input Voltage 額定電壓 (V)	Max. Output Power 功率 (W)	Output Current 輸出電流 (mA)	Output Voltage 輸出電壓 (V)	Power Factor 功率因數 (入)	Ambient Temperature 環境溫度 ta (°C)	Casing Temperature 最大外殼溫度 tc (°C)	Dimensions LxWxH 尺寸 (mm)	Weight 重量 (g)	Wiring Diagram 接線圖
Q4-350mA-6W	220-240	6	350	2-18	0.55C	-20...+50	80	81x39x22	50	A
Q4-350mA-12W	220-240	12	350	2-34	0.80C	-20...+50	80	98x39x22	60	A
Q4-350mA-20W	220-240	20	350	2-58	0.80C	-20...+50	80	113x44x28	100	A
Q4-500mA-6W	220-240	6	500	2-12	0.55C	-20...+50	80	81x39x22	50	A
Q4-500mA-12W	220-240	12	500	2-24	0.80C	-20...+50	80	98x39x22	60	A
Q4-500mA-20W	220-240	20	500	2-40	0.80C	-20...+50	80	113x44x28	100	A
Q4-700mA-6W	220-240	6	700	2-9	0.55C	-20...+50	80	81x39x22	50	A
Q4-700mA-12W	220-240	12	700	2-17	0.80C	-20...+50	80	98x39x22	60	A
Q4-700mA-20W	220-240	20	700	2-29	0.80C	-20...+50	80	113x44x28	100	A
Q4-1050mA-6W	220-240	6	1050	2-6	0.55C	-20...+50	80	81x39x22	50	A
Q4-1050mA-12W	220-240	12	1050	2-12	0.80C	-20...+50	80	98x39x22	60	A
Q4-1050mA-20W	220-240	20	1050	2-19	0.80C	-20...+50	80	113x44x28	100	A

### Standards 標準

- EN 61347-1
- EN 61347-2-13
- EN 55015
- EN 61000-3-2
- EN 61000-3-3
- EN 61547

