


NOTES: UNLESS OTHERWISE SPECIFIED

1.

NOTICE:	THIS IS A RoHS COMPLIANT COMPONENT/PRODUCT. ALL ENGINEERING CHANGES MUST HAVE PRIOR APPROVAL BY THE DESIGN CENTER.
RoHS-6 	


2. PLASTIC: THERMOSET PLASTIC MATERIAL WITH FLAMMABILITY RATING UL 94V-0 OR BETTER.
3. SOLDERABILITY: CONFORMS TO ANSI/J-STD-002 245°C REFLOW PEAK TEMPERATURE PER IPC/EIA J-STD-003A
4. OPERATING TEMPERATURE: 0°C TO +70°C
5. STORAGE TEMPERATURE: -20°C TO +125°C
6. JEDEC MOISTURE: LEVEL 1.
7. DIMENSIONS ARE IN INCHES [MILLIMETERS] WITH THE FOLLOWING TOLERANCES: [MILLIMETERS] ARE FOR REFERENCE ONLY.
.XX= ±.01 [±0.25]
.XXX= ±.005 [±0.13]
8. NOT FOR SALE IN U.S.

ELECTRICAL CHARACTERISTICS:
ELECTRICAL: Ⓢ +25°C


PARAMETER	SPECIFICATIONS			
OPERATING TEMP	0°C - 70 °C			
URNS RATIO	1 : 1 ±2%			
POLARITY	PER SCHEMATIC			
INSERTION LOSS	100 KHz - 100 MHz			
	-1.1 dB MAX			
RETURN LOSS, 1000BT (Z OUT = 100 OHM ±15%)	.1-30 MHz	30-60 MHz	60-80 MHz	
	-16 dB MIN	-10+20*LOG ₁₀ (f/60 MHz) dB MIN	-10 dB MIN	
INDUCTANCE (OCL) (MEDIA SIDE, 0°C-70°C)	350 uH MIN (MEASURED AT 100 KHz, 100 mVRMS) (AND WITH 8 mA DC BIAS)			
	1 MHz	30 MHz	60 MHz	100 MHz
CROSSTALK, ADJACENT CHANNELS	-35 dB MIN	-35 dB MIN	-30 dB MIN	-30 dB MIN
	30 MHz	60 MHz	100 MHz	
DIFFERENTIAL TO COMMON MODE REJECTION	-42 dB MIN	-37 dB MIN	-30 dB MIN	
	.65 OHMS MAX			
DC RESISTANCE, 1/2 WINDING	±.065 OHMS MAX (CENTER TAP SYMMETRY)			
DC RESISTANCE IMBALANCE	1500 VRMS MIN Ⓢ 60 SECONDS			
INPUT - OUTPUT ISOLATION				

NOTE: f IS FREQUENCY IN MHz.


© Copyright, 2013. Pulse Electronics, Inc. All rights reserved. Drawing specifications subject to change without notice. (10/15/13)



TRANSMIT

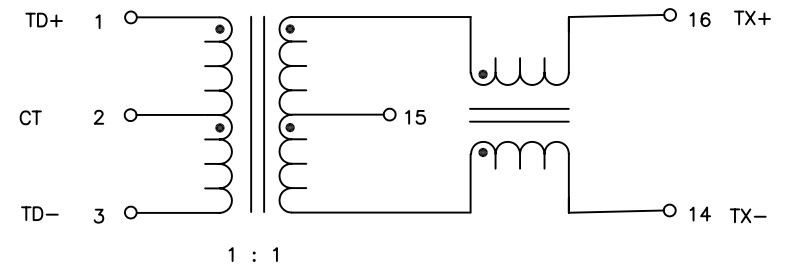

RECEIVE

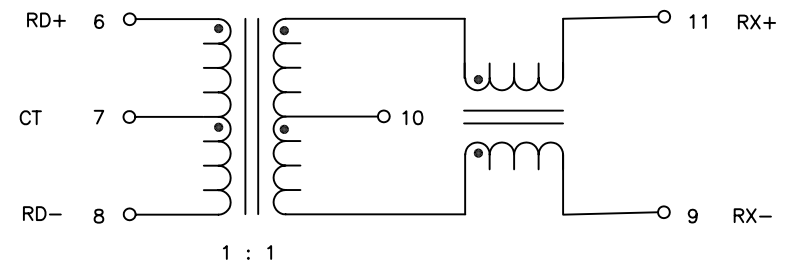

SCHEMATIC

PULSE CONFIDENTIAL
&
PROPRIETARY





PRODUCT DESCRIPTION
MDL,SIN,100D,1:1,SMT

PS DRAWING
PS-2005.001-D

SHEET:
1

DWG. NO./ PART NO.
H1102NL

REV.
M24

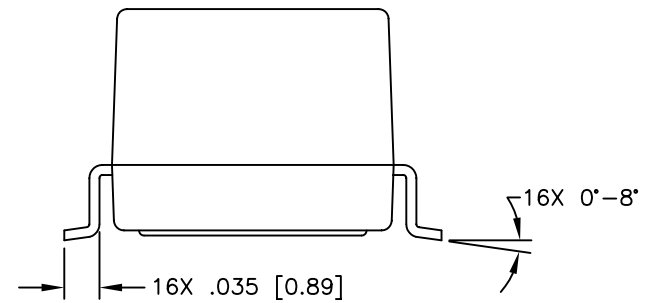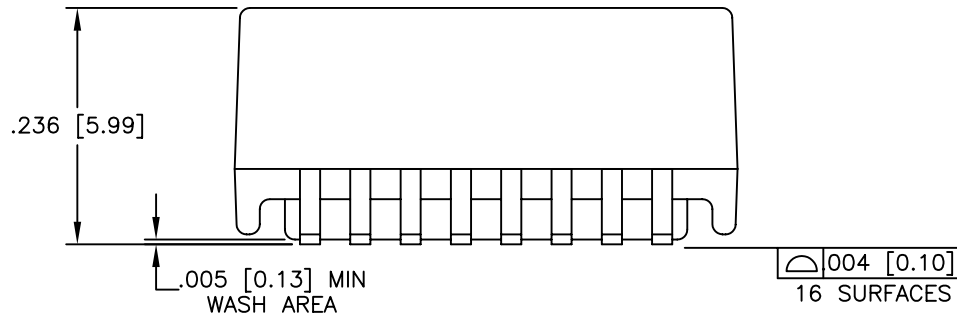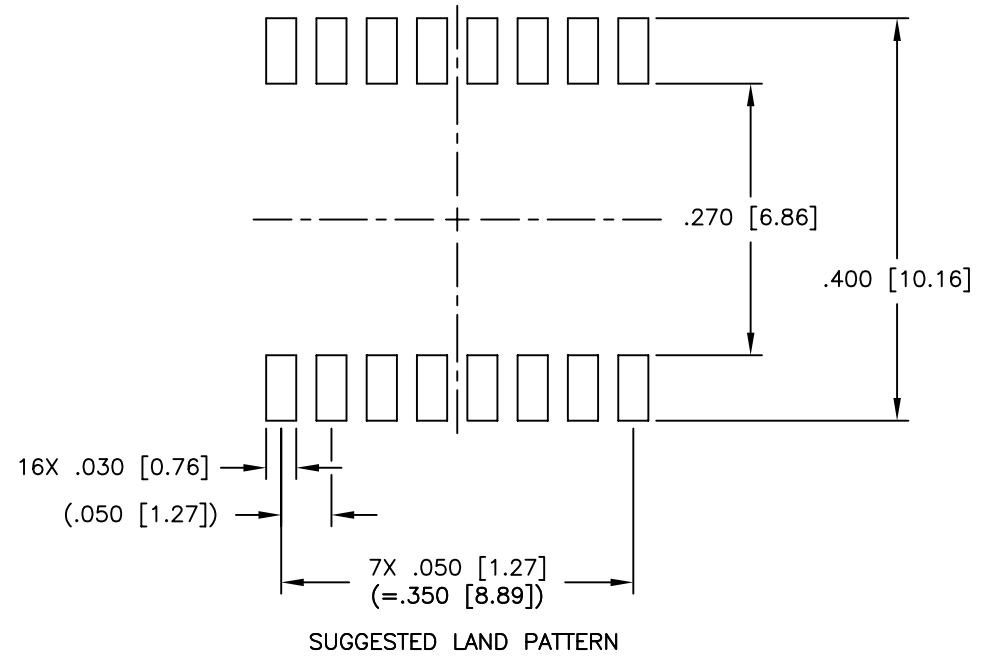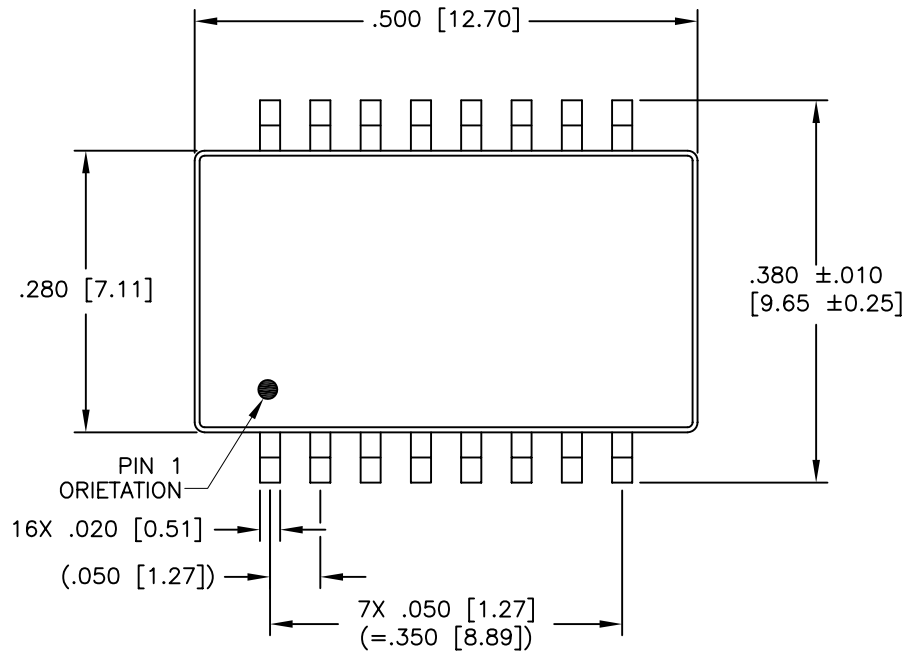

© Copyright, 2013. Pulse Electronics, Inc. All rights reserved. Drawing specifications subject to change without notice. (10/15/13)

PULSE CONFIDENTIAL
&
PROPRIETARY

PRODUCT DESCRIPTION
MDL,SIN,100D,1:1,SMT

PS DRAWING
PS-2005.001-D

SHEET:
2

DWG. NO./ PART NO.
H1102NL

REV.
M24

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

[H1102](#) [H1102T](#) [H1102NL](#) [H1102NLT](#)